


# Hose Reel

## Models HR6000 & HR3000



### Features:

- The reel's primary purpose is to dispense or collect fluid circulation hose on job sites.
- Available with 6000 or 3000 foot 3/4" I.D. hose packages.
- "Unique" auto-feed system makes laying out hose on a job site a one-man operation.
- Can also be used to store or deploy other distribution system hoses used in Dryair portable heating applications.
- Independent modular design offers the following advantages over built-in reels; You have the choice of storing the hose reel at a secure location on or off the job site when not in use. Allows deployment of hose at more than one job site.
- Transport trailers are available.

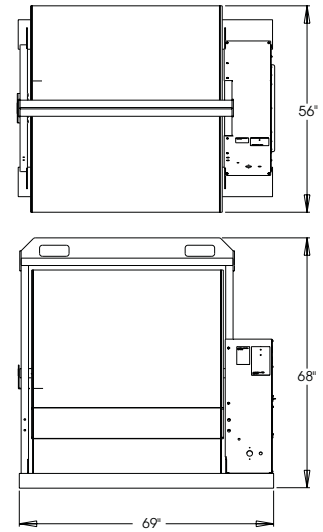

### Specifications

|                            |   |
|----------------------------|---|
| Controls.....              | Variable rotational speed - 0 to 20 RPM, forward/reverse.   |
| .....                      | Activation is automatic default (foot switch to load hose, auto-feed switch to unload hose).  |
| Hose loops .....           | 3/4" (1"O.D.) x 750' hose loops with 3/4" hydraulic-style quick couplers.   |
| HR6000 .....               | Eight 750' hose loops, for 9,000 sq. ft. coverage at 18" spacings   |
| HR3000 .....               | Four 750' hose loops, 4,500 sq. ft. coverage at 18" spacings.   |
| Power requirements.....    | 115 VAC, 15 amp   |
| Motor.....                 | Leeson C6T17FB2D continuous duty electric motor, 1 HP, 3-phase,   |
| Adjustable frequency drive | Variable speed/soft-start AC motor control, phase converter - 1 to 3 phase, adjustable RMS current limit & motor overload protection, automatic reel rotation braking.  |
| Torque limiter clutch..... | GLI Model 350, provides drive and motor protection with a smooth clutching interface between the spool's high inertial forces and reel's drive components, allows 20 RPM to 0 RPM rotational speed reduction within a 1/4 revolution of the reel. |

|                  |  |
|------------------|--|
| Load .....       | forklift accessible from all four sides                  |
| Tarp cover ..... | weather and UV protection for the fluid circulation hose |
| Weight.....      | HR6000 - 4,355 lbs.                                      |
| .....            | HR3000 - 2,870 lbs.                                      |

Optional  
Transport trailers



**Heat Thaw Cure Dry**

DRYAIR INC. 606 Highway Drive, St.Brieux, SK., Canada, SOK 3V0  
Tel: (306) 275-4848, 1-888-750-1700, Fax: (306) 275-4664  
E-mail: dryair@dryair.ca Web: www.dryair.ca

DRYAIR INC. 1095 N. Main Street, Bowling Green, Ohio, USA, 43402  
Tel: (419) 354-8546, 1-866-354-8546, Fax: (419) 354-9706  
E-mail: dryair@dryair.us Web: www.dryair.us

Hose reel HR3000 HR6000 041217